




HOTCHKISS AIR SUPPLY

Heating, Ventilating & Air Movement Equipment

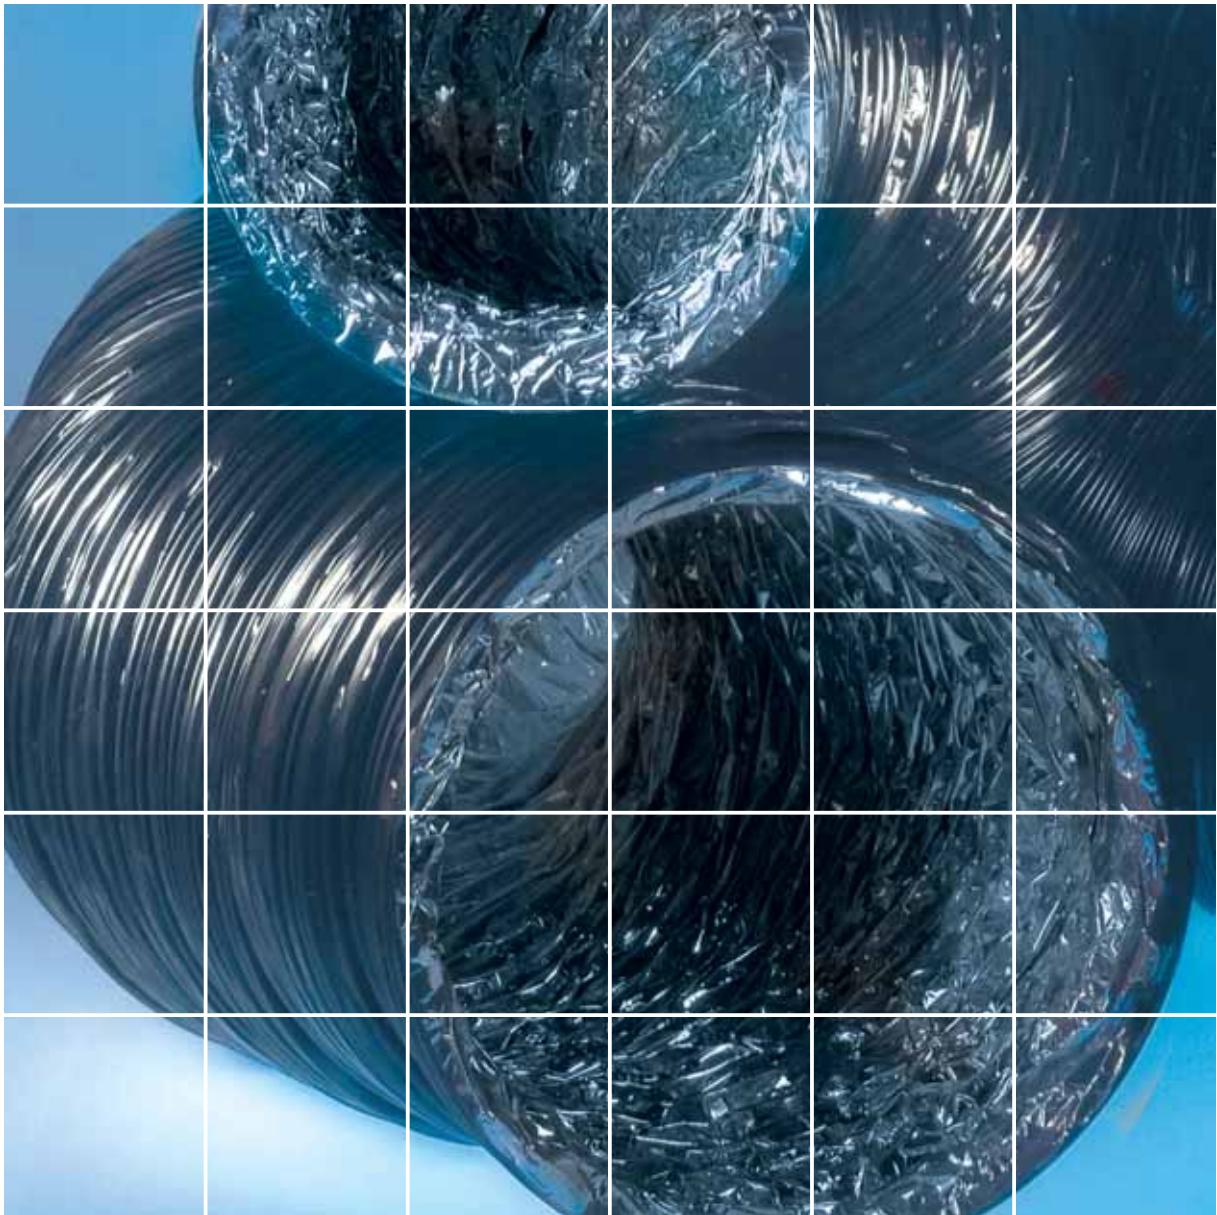

H A S C o m b i - F l e x



Applications

Combi-Flex is a new range of fully flexible reinforced, lightweight Aluminium Polyester and PVC laminated duct specially designed for the HVAC Market. Suitable for low, medium and high-pressure Heating, Ventilating and Air-Conditioning supply or Extract Systems for use on both commercial and industrial applications.

Construction

A laminated construction encapsulating a high tensile steel wire helix ensures there is no separation from the duct material. The Combi-Flex is covered with a tough co-polymer outer duct/vapour barrier, which acts as a unique extra airtight, strong and durable barrier.

Advantages

- Seamless smooth interior surface ensures a low-pressure drop and no dust collecting crevices when fully extended
- The lamination of the layers of Aluminium Polyester and PVC into one single product gives extra strength, durability and stability
- Easy to install over either round or oval connections
- Supplied in 6 metre lengths, compressed to 0.51 metres
- Individually boxed
- No special tools required for cutting or fixing
- In the event of a fire no toxic gases are emitted

Technical data

Construction material	Laminated, Reinforced Aluminium/Polyester & PVC
Wirepitch	25mm for 50mm and 80mm, 38mm for 125mm upwards
Temperature range °C	-30/+140
Max. positive working pressure	3000Pa
Packing	Individual box of 0.51 metre
External colour	Black
Diameter range (mm)	from 80mm to 610mm
Maximum air velocity	30m/sec
Standard length	6 metre
Clamping	Hasflex Lightning Band, Stainless Steel Clamps, Nylon Clamps or Quick Release Clamps

Head Office:
Heath Mill Road, Wombourne,
Wolverhampton,
West Midlands, WV5 8AP
Tel: (01902) 895161
Fax: (01902) 892045

www.hotchkissairsupply.co.uk email: sales@hotchkissairsupply.co.uk